



DROPLET
MEASUREMENT TECHNOLOGIES



ELEVATING ATMOSPHERIC MONITORING

From enhancing weather forecasts to monitoring air quality and increasing air traffic control safety, Micro Pulse LiDAR (MPL) is your trusted partner in remote atmospheric monitoring. Providing data in real time, this sophisticated laser remote sensing system uses the most advanced single-photon-counting detectors trusted by NASA. Make the fastest and most accurate decisions based on the reliable information from the MPL's continuous and autonomous monitoring.



DROPLET
MEASUREMENT TECHNOLOGIES


customer-contact@dropletmeasurement.com

Micro Pulse LiDAR

PERFORMANCE	MPL	MiniMPL
Range resolution	5/15/30/75 m (software programmable)	5/15/30/75 m (software programmable)
Minimum range	250 m	100 m
Accumulation time	1 sec - 15 mins	1 sec - 15 mins
Detection range*	Typically to 25 km	Typically to 15 km
Polarization	Standard	Standard
Scanning	Not available	Optional
OPTICS		
Laser wavelength	532 nm	532 nm
Laser pulse energy	6 - 8 μ J @ 2500 Hz	3 - 4 μ J @ 2500 Hz
Eye-safety	ANSI Z136.1 2000, IEC 60825	ANSI Z136.1 2000, IEC 60825
Receiver diameter	178 mm	80 mm
Pump laser diode	Guaranteed to 10,000 hours	Guaranteed to 10,000 hours
Detector	Fiber coupled	Fiber coupled, user replaceable
DIMENSIONS		
Size	300 x 350 x 850 mm	240 x 305 x 480 mm
Weight (portability)	27 kg	13 kg
DATA		
Operating system	Windows 7/10	Windows 7/10
Computer interface	USB	USB
Data transfer	LAN ethernet	LAN ethernet
ENVIRONMENT		
Temperature	Operating +10°C to 35°C	Operating +10°C to 35°C
Humidity	0 to 80%	0 to 80%
POWER		
Supply	110-240 VAC 50-60 Hz	110-240 VAC 50-60 Hz
Consumption	500 W	100 W

* Choosing a coarser resolution results in a longer detection range. Sample data is based on a 30s/30m setting.

Co Pol

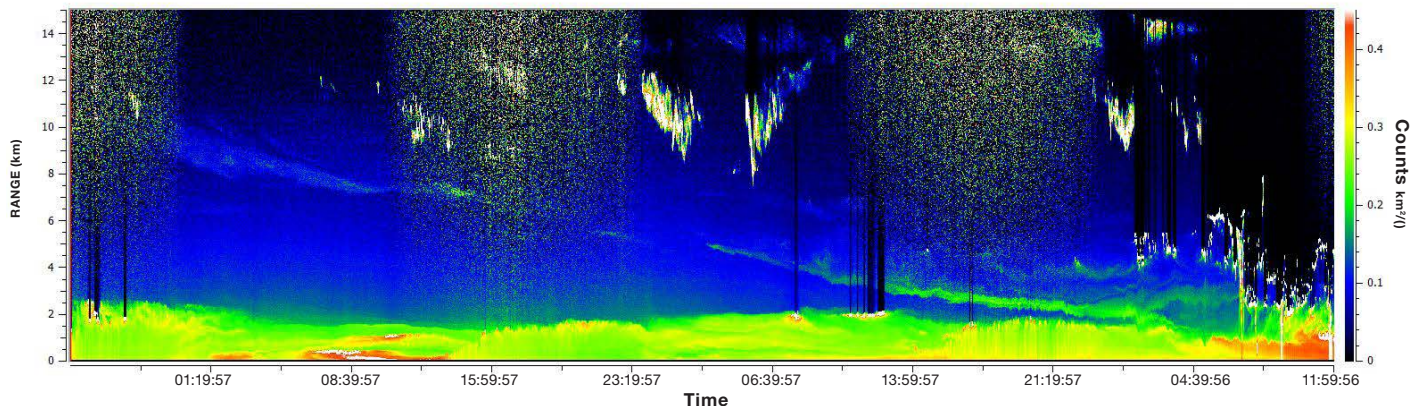

High altitude aerosol descends and merges into local boundary layer over a 3-day period.